




Direct Drive Pump

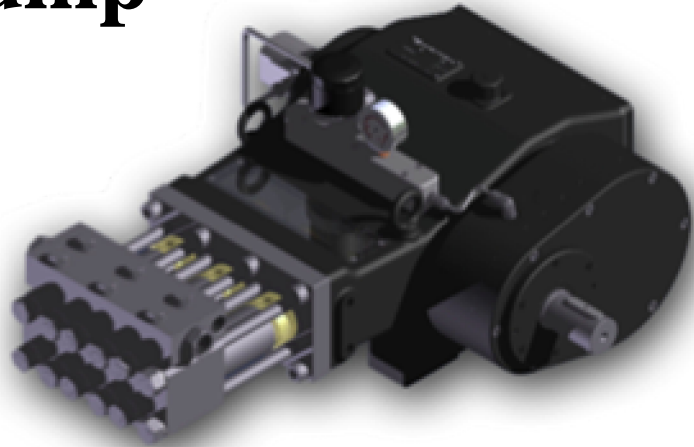

Type	HP / kW	STROKE	PLUNGER DIA.	PRESSURE (psi / bar)	Flow Rate (gpm / lpm)	Power Speed (rpm)	Pump Speed (rpm)	Reduce Rate
H100-20K	91 / 68	60	16	20,300 / 1,400	7 / 26.7	1500	738	2.034
H100-20K	92 / 69	60	16	20,300 / 1,400	7.1 / 26.9	1800	743	2.423
H100-30K	109 / 81	60	16	29,000 / 2,000	5.9 / 22.4	1500	619	2.423
H100-30K	105 / 79	60	16	29,000 / 2,000	5.6 / 21.4	1800	592	3.04
UH100-40K	100 / 75	60	12	40,000 / 2,760	4 / 15	1800	743	2.423
UH100-40K	100 / 75	60	12	40,000 / 2,760	4 / 15	1500	738	2.034
UH100-50K	100 / 75	60	12	50,000 / 3,450	3.1 / 12	1800	592	3.04
UH100-50K	106 / 80	60	12	50,000 / 3,450	3.3 / 12.6	1500	619	2.423

Features

- Easy field maintenance
- Drive shaft available on both sides
- Built-in gear box
- Compact
- Wide pressure range

Applications

- Water blasting
- Concrete demolition
- Runway cleaning
- Paint removal
- Heat exchange cleaning
- Tank and vessel cleaning



OH PRECISION CORPORATION
 175 TAIHE ROAD, JHUBEI CITY, HSINCHU COUNTY 302 TAIWAN
 TEL: +886 3 5540176 / FAX: +886 3 5543792
 www.ohprecis.com / info@ohprecis.com